



USB Port:connecting USB flash drives/ mobile phones

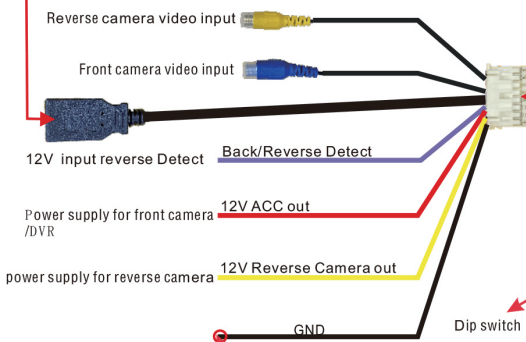


When the screen flashes, Disconnect the connection again(gray)


When the reverse is abnormal, Disconnect the connection again(green)

①-The connection method when the original vehicle does not have the 360-degree surround-view function. When the screen flashes, install the cable again


②-The connection method of the original vehicle with the 360-degree surround-view function. If the original car is equipped with a 360-degree surround-view function, it needs to be connected.

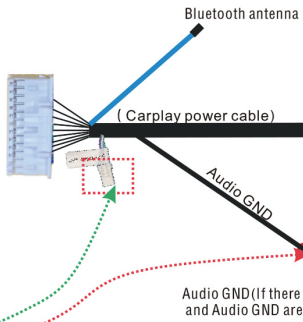

Transfer the LVDS cable removed from the OEM screen

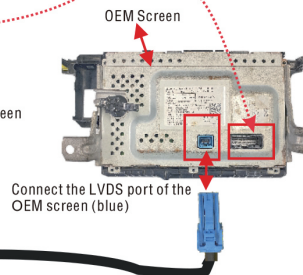

Transfer the power cable removed from the OEM CD host

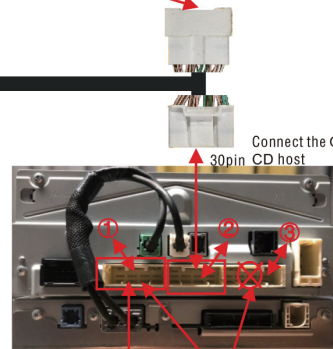


Connect the OEM 30pin CD host

Connect the OEM 28pin CD host

Note: the interface of ① and ③ is the same, Only interface ① can be transferred

Transfer the power cable removed from the OEM CD host

(Dip Switch)

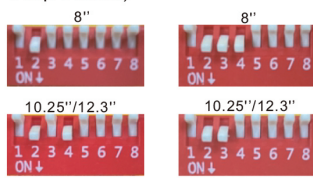

Note: 1.Remove the power cable of the box when replacing the DIP switch

- 1.Short press :Return to the previous level
- 2.Press and hold for 5 seconds:Enter the box system
- 3.Press and hold for 8 seconds:Reset box



- 1.Short press :Confirm
- 2. Press and hold for 5 seconds:Activated speech
- 3.Control system:Slide left/slide right (Slide up/ Slide down-page turning)



- 1.Press and hold for 3:Answer calls or hang up