



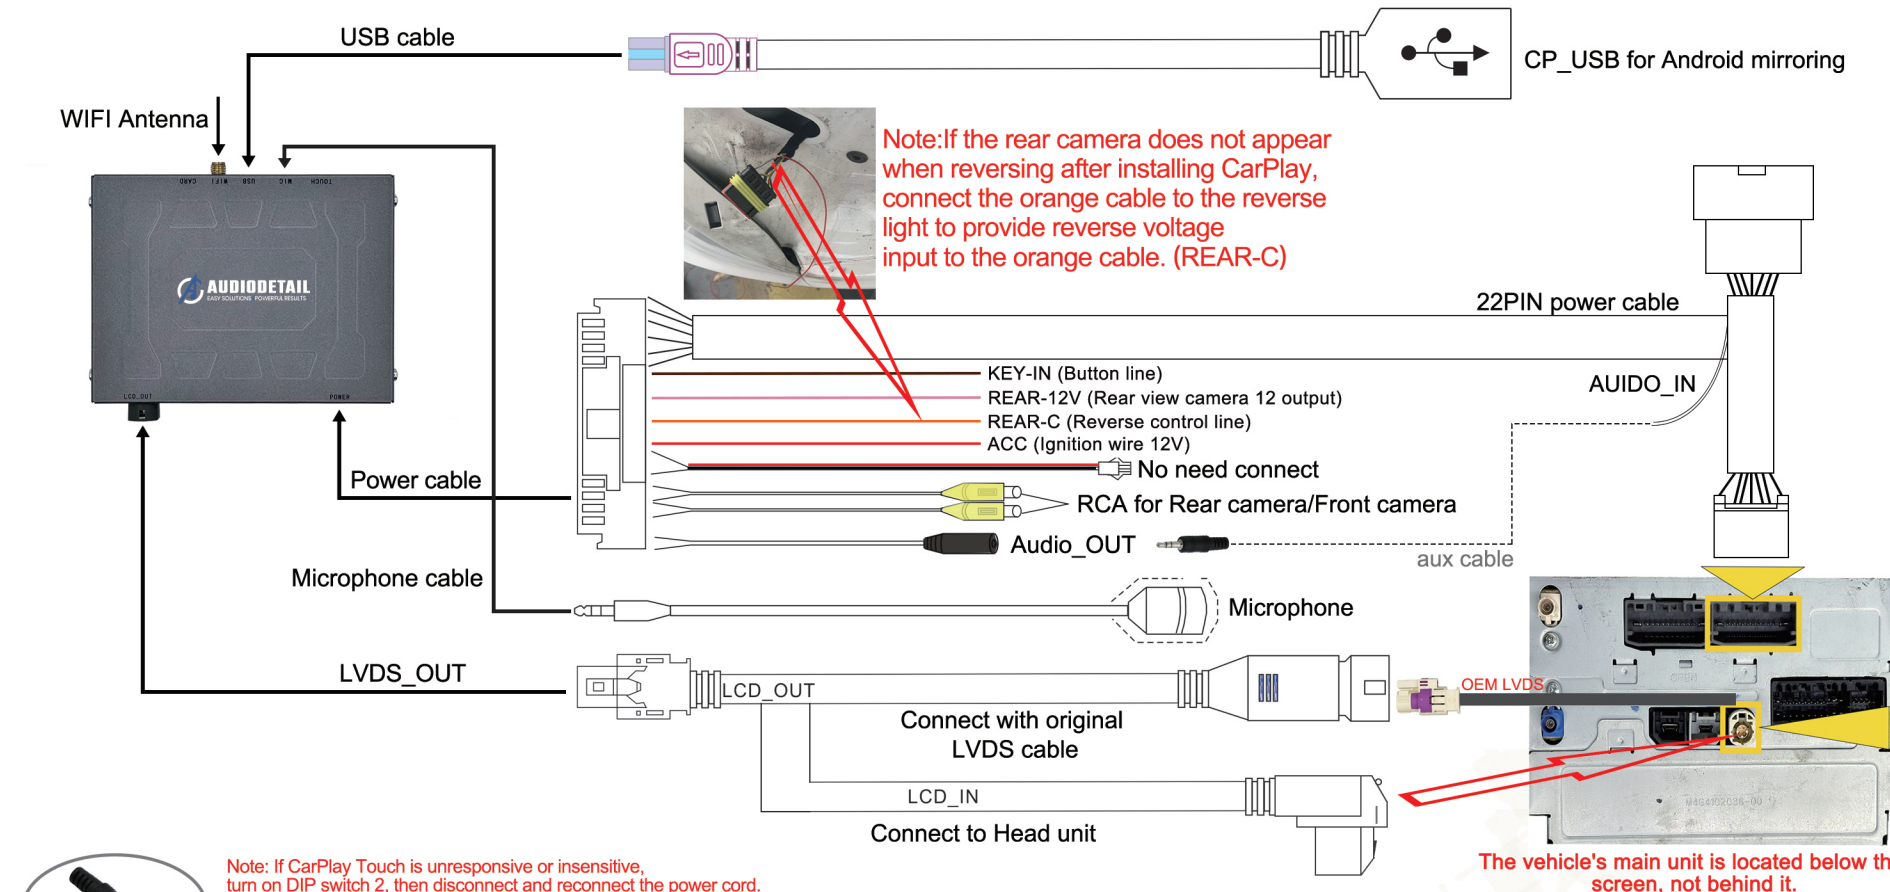

AUX adapter connect to aux port from armrest box



Note: If CarPlay Touch is unresponsive or insensitive, turn on DIP switch 2, then disconnect and reconnect the power cord. When the calibration crosshairs appear on the screen, tap the center of the crosshairs. Repeat this process until calibration is complete, then tap "OK". After calibration, return DIP switch 7 to its initial off position.

Dip switch	Status	Description
2	ON	Touch Correction
	OFF	OFF after correction
4	ON	Reverse Guideline OFF
	OFF	Reverse Guideline ON
8	ON	Original camera
	OFF	Aftermarket camera
1,3,5,6,7 no function, default OFF.		

Touch Screen Control

Long Press Switch to Carplay

Select AUX before switch to Carplay


How to Connect Wireless Apple CarPlay

1, Long press switch button (different car with different switch button, check from installation diagram) to enter system main menu as below (BMW for example):



2, Then turn ON Wi-Fi from iPhone's settings, you will find option of "WiFi-AP-****", but DO NOT need connect it, and DON'T connect any other network.

Turn ON Bluetooth, find and click "Audio Detail", then according below steps get wireless connection (Note: If "Audio Detail" shows connected, but didn't go to CarPlay, then click Setup -> Bluetooth -> Paired device -> WiFi CarPlay then iPhone will show Use CarPlay request)

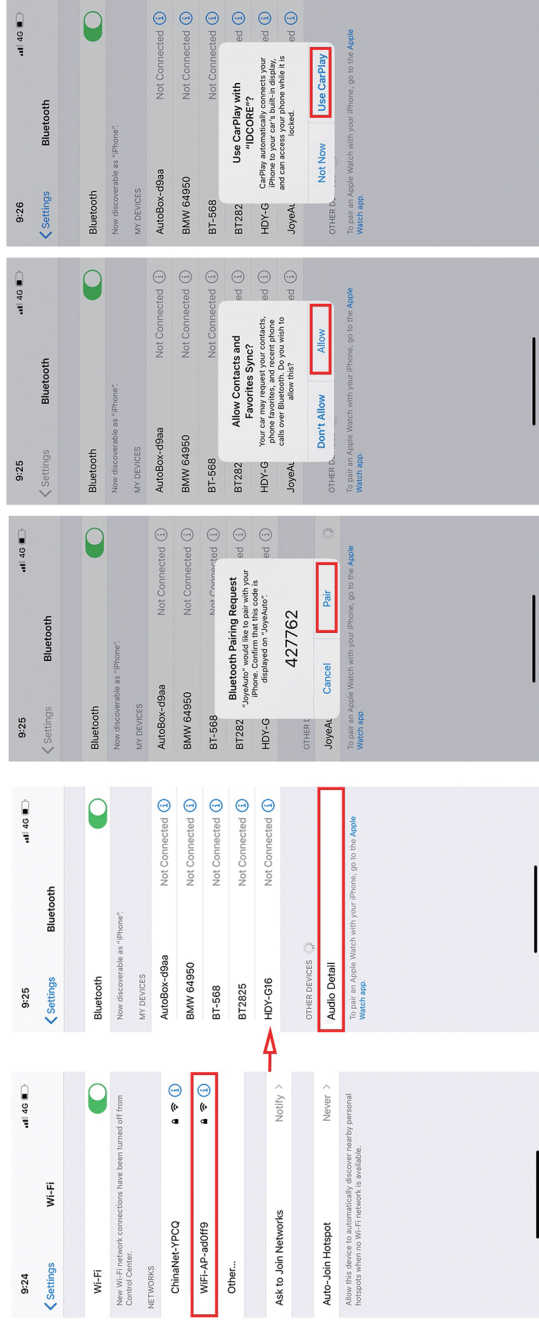

3, After 5 sec, it will enter CarPlay screen automatically, then enjoying...

